

Engine	Cummins 6LT9.3
Gross Power	162 kW (220 hp) @ 2,000 rpm
Net Power	154 kW (209 hp) @ 2,000 rpm
Operating Weight	16,700 kg
Standard Bucket Size	3 m <sup>3</sup>
Standard Breakout Force	165 kN
Standard Dump Clearance	2,972 mm

# 855H WHEEL LOADER



TOUGH WORLD. TOUGH EQUIPMENT.

# 855H SPECIFICATIONS >>>

## ENGINE

Emission Regulation	Tier 2 / Stage II
Make	Cummins
Model	6LT9.3
Gross Power	162 kW (220 hp) @ 2,000 rpm
Net Power	154 kW (209 hp) @ 2,000 rpm
Peak Torque	890 N · m
Displacement	9.3 L
Number of Cylinder	6
Aspiration	Turbocharged

## TRANSMISSION

Transmission Type	Planetary type, power shift
Torque Converter	Double stage, four elements
Maximum Travel Speed, fwd	39 km/h
Maximum Travel Speed, rev	16.5 km/h
Number of Speed, fwd	2
Number of Speed, Rev	1

## AXLES

Differential Front Type	Conventional
Differential Rear Type	Conventional
Axle Oscillation	±11°

## STEERING


Steering Configuration	Articulated
Steering Relief Pressure	14 MPa

## BRAKES

Service Brake Type	Caliper disc brake
Service Brake Actuation	Air over hydraulic
Parking Brake Type	Flexible shaft control
Parking Brake Actuation	Mechanical

## HYDRAULIC SYSTEM

Main Pump Type	Gear
Main Relief Pressure	18 MPa
Raise	5.9 s
Dump Time	1.5 s
Float Down Time	3 s
Fastest Total Cycle Time	10.4 s

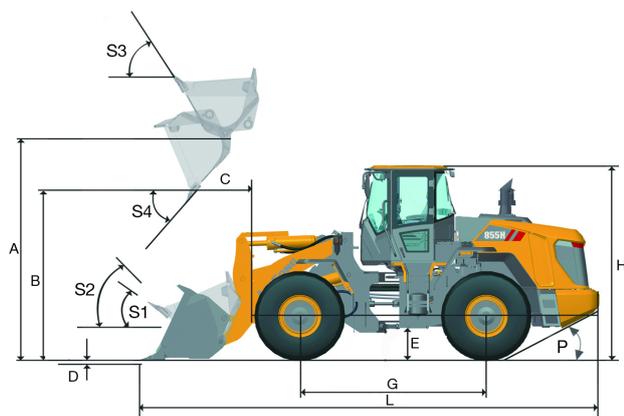

## LOADER ARM PERFORMANCE

Tipping Load - Straight	12,000 kg
Tipping Load - Full Turn	10,600 kg
Bucket Breakout Force	165 kN
A Maximum Hinge Pin Height	4,030 mm
B Dump Clearance at Full Height Discharge	2,972 mm
C Dump Reach at Full Height Discharge	1,146 mm
D Maximum Digging Depth, Bucket Level	92 mm
S <sub>1</sub> Bucket Rollback at Ground Level	45°
S <sub>2</sub> Bucket Rollback at Carry	49°
S <sub>3</sub> Bucket Rollback at Maximum Height	60.6°
S <sub>4</sub> Maximum Dump Angle at Full Height	48°

## BUCKET PERFORMANCE

Reference Bucket	2.6 - 5.2 m <sup>3</sup>
------------------	--------------------------

## DIMENSIONS

E Ground Clearance	472 mm
G Wheelbase	3,250 mm
H Cab Height	3,450 mm
J Wheel Tread	2,150 mm
K Width Over Tires	2,750 mm
L Length with Bucket Down	8,202 mm
M Turn Angle, Either Side	38°
P Rear Angle of Departure	27°
R <sub>1</sub> Turning Radius, Bucket Carry	6,796 mm
R <sub>2</sub> Turning Radius, Outside of Tire	6,103 mm

## TIRES

Tire Size	23.5 - 25
-----------	-----------

## OPERATING WEIGHTS

Operating Weight	16,700 kg
------------------	-----------

## SERVICE CAPACITY

Fuel Tank	300 L
Engine Oil	22 L
Cooling System	42 L
Hydraulic System	160 L
Transmission and Torque Converter	45 L
Axles, Front/Rear	33 L / 33 L

